


P3AC24-16-25

24VAC, 16 OUTPUT, 25 AMP CCTV POWER SUPPLY



The P3AC24-16-25 power supply is engineered to manage remote camera and accessory power requirements for various CCTV or general security applications. The P3AC24-16-25 is designed with sixteen (16) individually fused, non-power limited outputs of 24VAC. Each unit is housed in a premium heavy gauge, front spring loaded, locking enclosure.

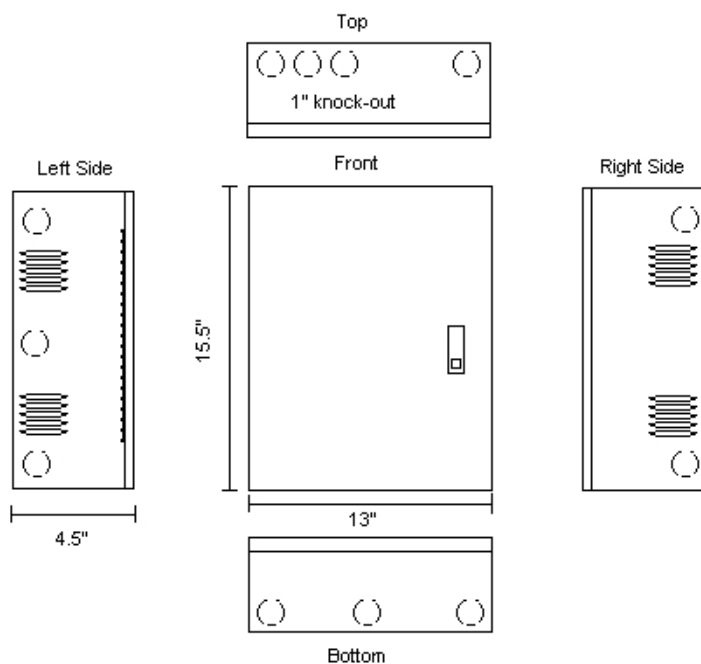

FEATURES

- Convenient screw terminal and fuse access
- Power ON/OFF switch
- AC power LED indicator (Green)
- Individual output LED indicates power is present (Red)
- Easy to identify automotive style fuses
- Front spring loaded, locking, side vented, heavy gauge metal enclosure
- Double coated polyurethane finish
- Knock-out for cam-lock
- Multiple 1" knock-outs to accommodate various wiring configurations
- Spare fuses and AC line cord included (for testing purposes)
- Also available in 28VAC version: **P3AC28-16-21**
- Also available with optional PTC protected outputs - **P3AC24-16-25CB**

SPECIFICATIONS

- Input 115VAC 50/60 HZ: 5.4A
- Output: 25A @ 24VAC (600VA)
- Individual output fuses are rated at 3A
- Main fuse is rated at 15A
- Unit maintains camera synchronization
- Transformer includes built-in thermal protection
- Maximum temperature range: 32°F to 120°F (0°C to 49°C)
- Ideal operating temperature: 70°F (21°C)
- For indoor use only
- Enclosure dimensions: 15.5" (H) x 13" (W) x 4.5" (D)
- Shipping weight: 32 lbs

1-877-478-4733

WWW.PTHREE.COM

**Specifications subject to change without notice*