

# P3DC15-4-3L

6, 12 or 15VDC, 4 OUTPUT, 2.5 AMP CCTV POWER SUPPLY




The P3DC15-4-3L power supply is engineered to manage remote camera and accessory power requirements for various CCTV or general security applications. The P3DC15-4-3L is designed with four (4) individually fused outputs or selectable 6, 12 or 15VDC. Each unit is housed in a premium heavy gauge, side latching metal enclosure.

## FEATURES


- Convenient screw terminal and fuse access
- Power ON/OFF switch
- AC power LED indicator (Green)
- Individual output LED indicates power is present (Red)
- Easy to identify automotive style fuses
- Side latching, side vented, heavy gauge metal enclosure
- Double coated polyurethane finish
- Knock-out for cam-lock
- Multiple 1" knock-outs to accommodate various wiring configurations

## SPECIFICATIONS

- Requires transformer
  - ◇ 6VDC - minimum 24VAC, 50VA - (P3PT2450) - 2.5A
  - ◇ 12VDC - minimum 24VAC, 50VA - (PPT2450) - 2.0A
  - ◇ 15VDC - minimum 24VAC, 50VA - (P3PT2450) - 2.0A
- Individual output fuses are rated at 1A
- Main fuse rated at 5A
- Built-in charging circuit for sealed lead acid batteries
- Selectable voltage can be adjusted +/- 10% to compensate for long wire runs
- Maximum temperature range: 32°F to 120°F (0°C to 49°C)
- Ideal operating temperature: 70°F (21°C)
- For indoor use only
- UL Listed 
- Enclosure dimensions: 10" (H) x 9" (W) x 4.5" (D)
- Shipping weight: 6 lbs

## RELATED PART NUMBERS

- **P3DC15-4-3:** Kit includes (1) P3DC15-4-3L and (1) P3XR24100 open frame transformer, 9 lbs
- **P3DC15-4-3LT:** Kit includes (1) P3DC15-4-3L and (1) P3PT2450 open frame transformer, 8 lbs

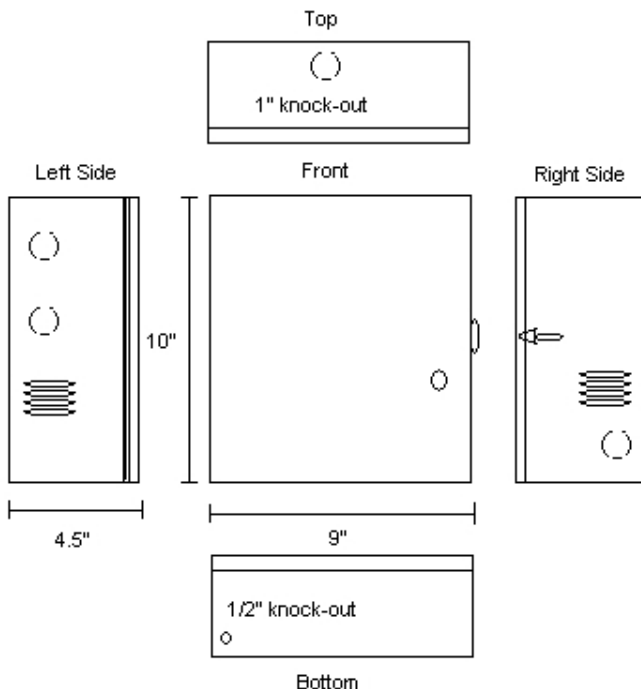

1-877-478-4733

WWW.PTHREE.COM

\*Specifications subject to change without notice